

12.8V 165Ah Smart Self-Heating

LiFePO4 Battery

Part Number: L12V165-165-HBT-4-A100



Basic Specification

Nominal Voltage	12.8V
Nominal Capacity	165Ah
Nominal Energy	2112Wh
Internal Resistance	≤40mΩ
Function	Bluetooth Self-Heating
Max. Continuous Output Power	2112W
BMS Board	165A
Max. Batteries in Series and Parallel	4P4S
System Max. Extended Power	33.792kW
System Max. Extended Energy	33.792kWh

Charge Specification

Max. Continuous Charging Current	165A
Recommended Charging Current	33A
Recommended Charging Voltage	14.4±0.2V

Discharge Specification

Max. Continuous Discharging Current	150A
Peak Discharging Current	700A/s

Environment Specification

Storage Temperature Range	-10°C - 50°C (14°F - 122°F)
Recommended Storage Temperature	10°C - 35°C (50°F - 95°F)
Charging Temperature Range	0°C - 50°C (32°F - 122°F)
Discharging Temperature Range	-20°C - 60°C (-4°F - 140°F)


Mechanical Specification

Dimension(L * W * H)	L13*W6.77*H8.5 inch 330*172*216mm
Weight	Approx. 33.49 lbs/15.19 kg
Terminal Type	M8*16mm
Terminal Torque	13±1 N·m
Case Material	ABS
IP Rating	IP65
Cell Type-chemistry	LiFePO4
BCI	Group31

Safety Specification


Certifications	UL-1973,FCC,CE,RoHS,UN38.3
Protection	Over-temperature/Over-discharge/Over-current/Over-voltage/Short-circuit/Low Temperature Cut-off Protection

Dimensions

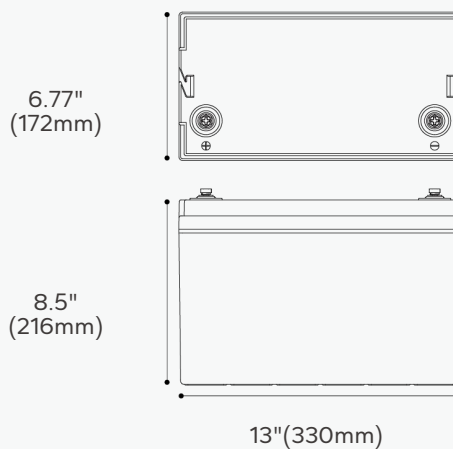


Performance Curves


Discharge Performance at 25°C

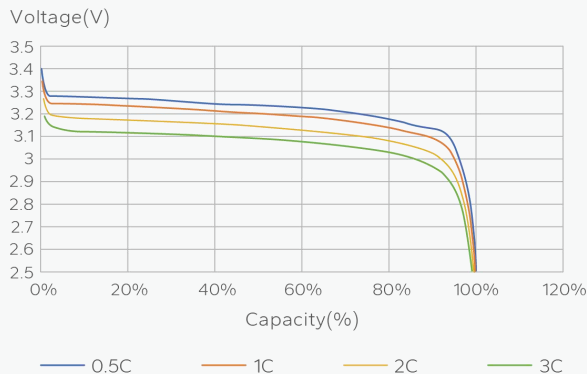


Charge and Discharge at 25°C, 0.5C

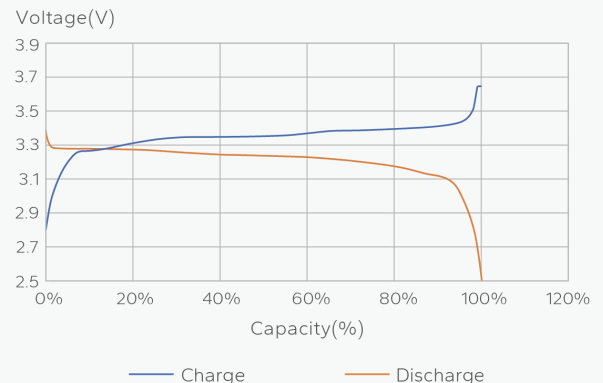

Discharge Curves at Different Temperature

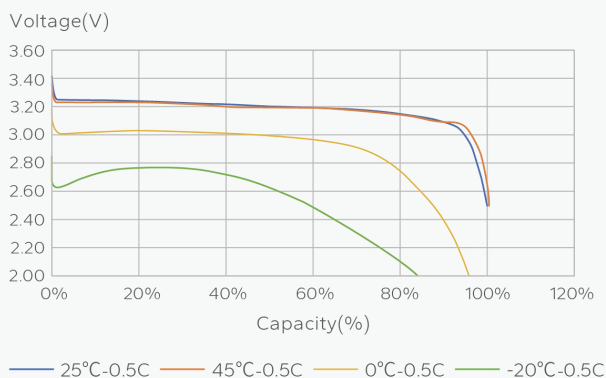


Cycle Life with DOD at 25°C

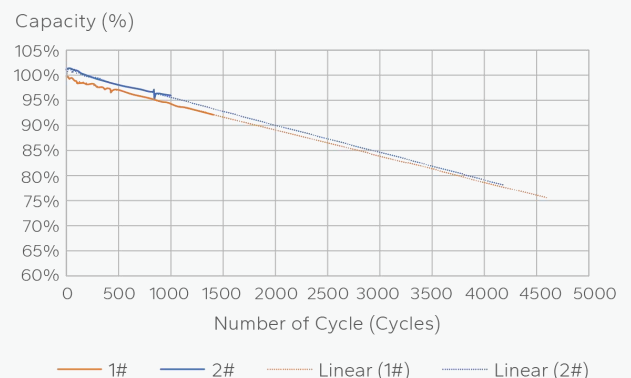

How to Estimate the Battery Capacity

The battery capacity could be roughly estimated by its **resting voltage** (not charging/discharging voltage). Since the voltage of each battery is slightly different, and the voltage measurement is affected by the measuring instrument, ambient temperature, etc., the following parameters are for reference only.

Resting Voltage: The voltage is measured after the battery has been disconnected from the charger and loads with zero current, and left alone for 30 minutes.

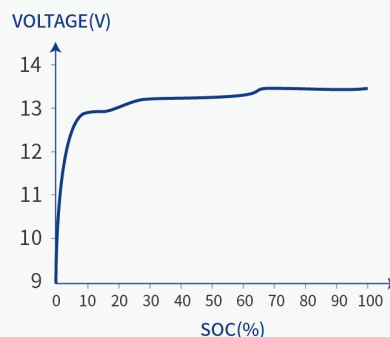

SOC (%)	VOLTAGE (V)
0	10 to 12
25	13 to 13.15
50	13.15 to 13.2
75	13.3 to 13.33
100	≥13.33

① Based on the characteristics of LiFePO₄ batteries, the voltage measured by all LiFePO₄ batteries during charging/discharging is not the real voltage of the battery. Therefore, after charging/discharging and disconnecting the battery from the power source, the voltage of the battery will gradually drop/increase to its real voltage.