

12.8V 200Ah Plus Self-heating

LiFePO4 Battery

Part Number: L12V200-200-HEAT-8-A160



Basic Specification

Nominal Voltage	12.8V
Nominal Capacity	200Ah
Nominal Energy	2560Wh
Internal Resistance	≤40mΩ
Function	self-heating
Max. Continuous Output Power	2560W
BMS Board	200A
Max. Batteries in Series and Parallel	4P4S
System Max. Extended Power	40.96KW
System Max. Extended Energy	40.96KWh

Charge Specification

Max. Continuous Charging Current	200A(1C)
Recommended Charging Current	40A(0.2C)
Recommended Charging Voltage	14.4±0.2V

Discharge Specification

Max. Continuous Discharging Current	200A(1C)
Peak Discharging Current	1000A (5C) / 1s

Environment Specification

Storage Temperature Range	-10°C - 50°C (14°F - 122°F)
Recommended Storage Temperature	10°C - 35°C (50°F - 95°F)
Charging Temperature Range	-20°C to 50 °C (-4°F to 122 °F)
Discharging Temperature Range	-20°C - 60°C (-4°F - 140°F)


Mechanical Specification

Dimension(L * W * H)	L20.95*W8.15*H 8.5 in 532*207*216 mm
Weight	Approx. 44.07lbs/19.99kg
Terminal Type	M8*16 mm
Terminal Torque	12 to 14 N·m
Case Material	ABS
IP Rating	IP65
Cell Type-chemistry	LiFePO4
BCI	/

Safety Specification


Certifications	FCC,CE,RoHS,UN38.3
Protection	High Temperature/Low Temperature Charge/Low Temperature Discharge/Over- Discharge /Over-Current /Over-Voltage Protection/Short Circuit Protection

Dimensions

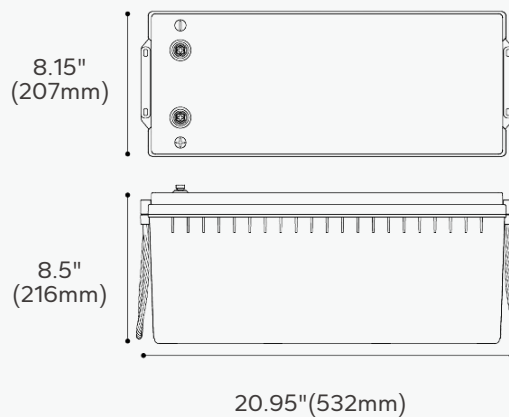


Performance Curves


Discharge Performance at 25°C

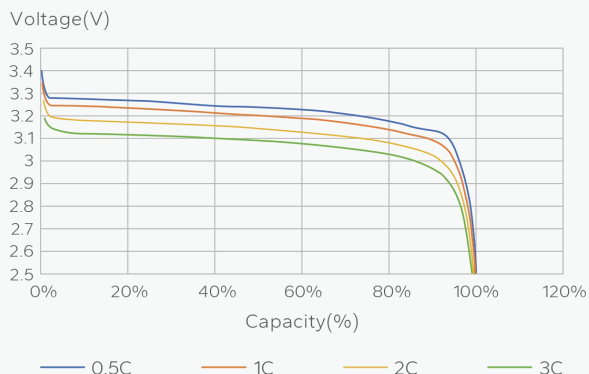


Charge and Discharge at 25°C, 0.5C

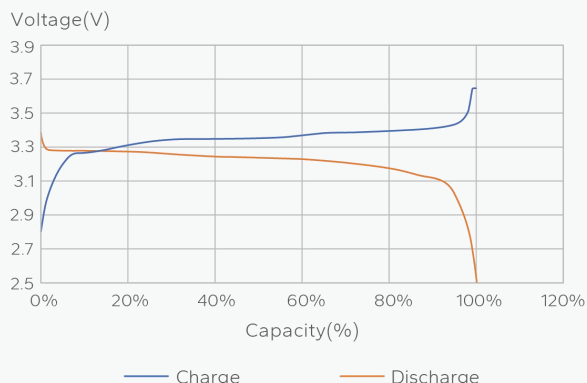

Discharge Curves at Different Temperature

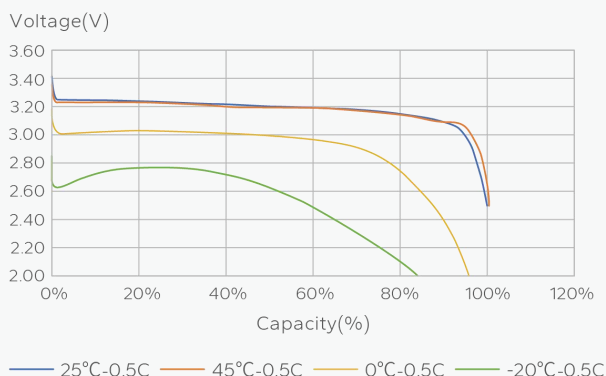


Cycle Life with DOD at 25°C

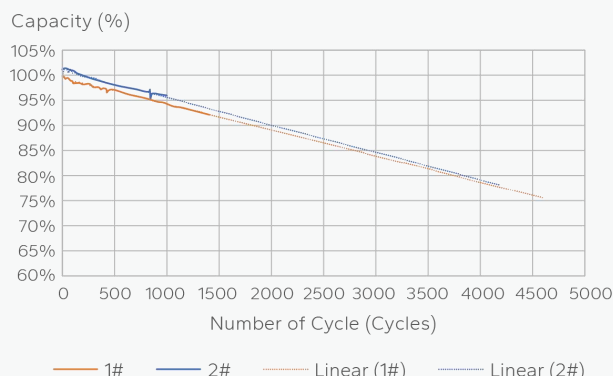

How to Estimate the Battery Capacity

The battery capacity could be roughly estimated by its **resting voltage** (not charging/discharging voltage). Since the voltage of each battery is slightly different, and the voltage measurement is affected by the measuring instrument, ambient temperature, etc., the following parameters are for reference only.

Resting Voltage: The voltage is measured after the battery has been disconnected from the charger and loads with zero current, and left alone for 30 minutes.

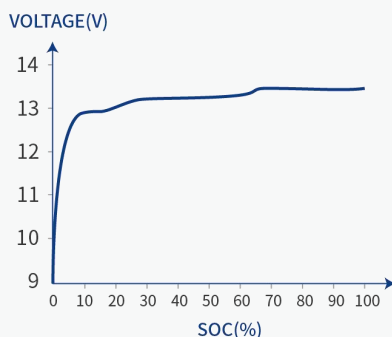

SOC (%)	VOLTAGE (V)
0	10 to 12
25	13 to 13.15
50	13.15 to 13.2
75	13.3 to 13.33
100	≥13.33

① Based on the characteristics of LiFePO4 batteries, the voltage measured by all LiFePO4 batteries during charging/discharging is not the real voltage of the battery. Therefore, after charging/discharging and disconnecting the battery from the power source, the voltage of the battery will gradually drop/increase to its real voltage.