

16V 70Ah Smart

LiFePO4 Battery

Part Number: L16V70-70-MELE-BT-5-A70



Basic Specification

Nominal Voltage	16V
Nominal Capacity	70Ah
Nominal Energy	1120Wh
Internal Resistance	≤40mΩ
Function	Bluetooth
Max. Continuous Output Power	1120W
BMS Board	70A
Max. Batteries in Series and Parallel	4P1S
System Max. Extended Power	4.48kW
System Max. Extended Energy	4.48kWh

Charge Specification

Max Continuous Charging Current	70A
Recommended Charging Current	14A
Recommended Charging Voltage	18±0.25V

Discharge Specification

Max. Continuous Discharging Current	70A
Peak Discharging Current	350A/s

Environment Specification

Storage Temperature Range	-10°C - 50°C (14°F - 122°F)
Recommended Storage Temperature	10°C - 35°C (50°F - 95°F)
Charging Temperature Range	0°C - 50°C (32°F - 122°F)
Discharging Temperature Range	-20°C - 60°C (-4°F - 140°F)


Mechanical Specification

Dimension(L * W * H)	L10.24*W6.61*H8.27 inch 260*168*210mm
Weight	Approx. 19.14 lbs/8.68kg
Terminal Type	M8*16mm
Terminal Torque	13±1N·m
Case Material	ABS
IP Rating	IP65
Cell Type-chemistry	LiFePO4
BCI	Group24

Safety Specification


Certifications	CE,RoHS,UN38.3,FCC ID,UL-2054
Protection	Over-temperature/Over-discharge/Over-current/Over-voltage/Short-circuit Protection/Low Temperature Cut-off Protection

Dimensions

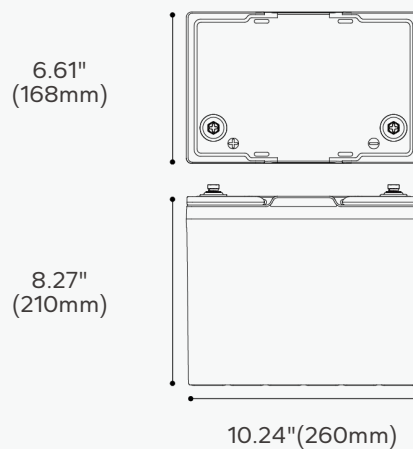


Performance Curves & SOC Reference


Discharge Performance at 25°C

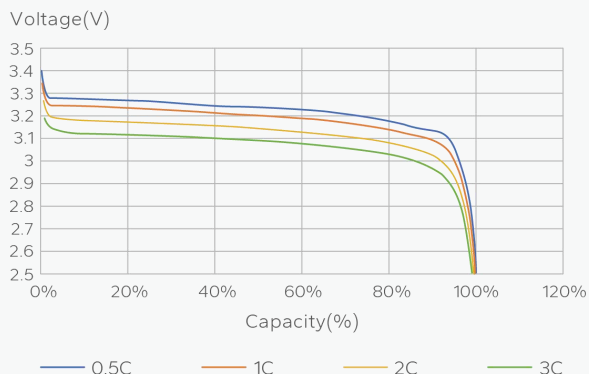


Charge and Discharge at 25°C, 0.5C

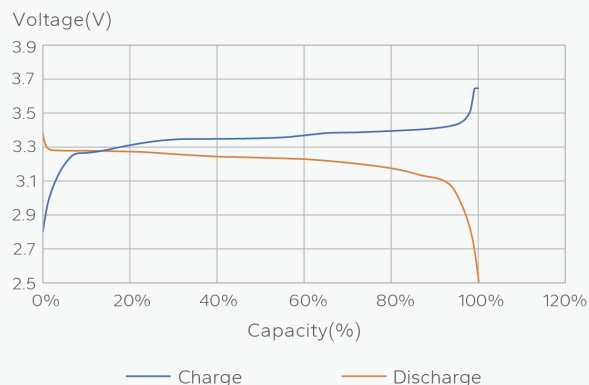

Discharge Curves at Different Temperature

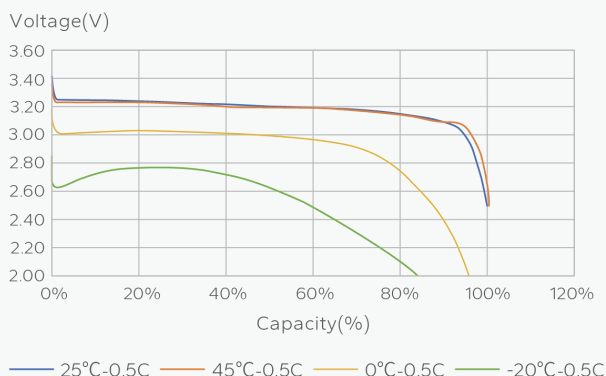


Cycle Life with DOD at 25°C

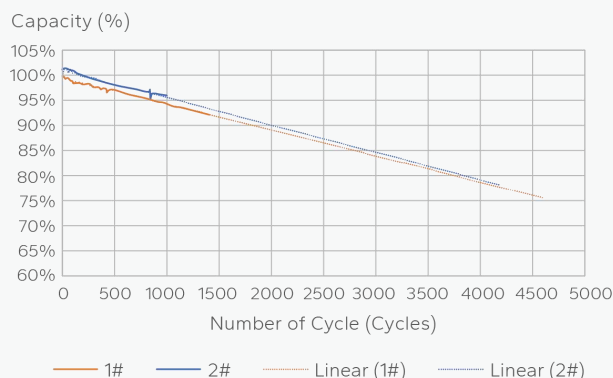

How to Estimate the Battery Capacity

The battery capacity could be roughly estimated by its **resting voltage** (not charging/discharging voltage). Since the voltage of each battery is slightly different, and the voltage measurement is affected by the measuring instrument, ambient temperature, etc., the following parameters are for reference only.

Resting Voltage: The voltage is measured after the battery has been disconnected from the charger and loads with zero current, and left alone for 30 minutes.

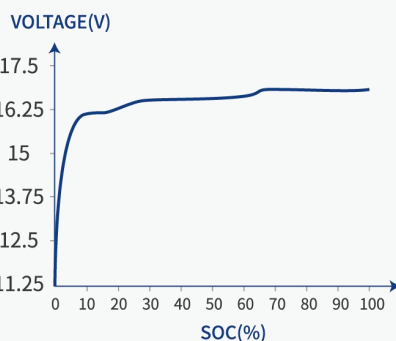

SOC (%)	VOLTAGE (V)
0	12.5 to 15
25	16.25 to 16.44
50	16.44 to 16.5
75	16.63 to 16.66
100	≥16.66

① Based on the characteristics of LiFePO4 batteries, the voltage measured by all LiFePO4 batteries during charging/discharging is not the real voltage of the battery. Therefore, after charging/discharging and disconnecting the battery from the power source, the voltage of the battery will gradually drop/increase to its real voltage.