

51.2V 30Ah GC Smart

LiFePO4 Battery

Part Number: L51.2V30-100-GC-BT-32-AGC2



Basic Specification

Nominal Voltage	51.2V
Nominal Capacity	30Ah
Nominal Energy	1536Wh
Internal Resistance	≤40mΩ
Function	Bluetooth/Low Temp
Max. Continuous Output Power	4096W
BMS Board	100A
Max. Batteries in Series and Parallel	8P1S
System Max. Extended Power	32.768kW
System Max. Extended Energy	12.288kWh

Mechanical Specification

Dimension(L * W * H)	L10.24*W7.09*H10.43 inch 260*180*265mm
Weight	Approx. 29.03 lbs/13.17kg
Terminal Type	M8*16mm
Terminal Torque	13±1 N·m
Case Material	ABS
IP Rating	IP65
Cell Type-chemistry	LiFePO4
BCI	GC2

Charge Specification

Max. Continuous Charging Current	30A
Recommended Charging Current	6A
Recommended Charging Voltage	57.6±0.8V

Safety Specification

Certifications	CE, FCC, RoHS, UN38.3, UL-2271
Protection	Over-temperature/Over-discharge/ Over-current/Over-voltage/Short-circuit/Low-temperature

Discharge Specification

Max. Continuous Discharging Current	80A
Peak Discharging Current	300A/s

Environment Specification


Storage Temperature Range	-10°C - 50°C (14°F - 122°F)
Recommended Storage Temperature	10°C - 35°C (50°F - 95°F)
Charging Temperature Range	0°C - 50°C (32°F - 122°F)
Discharging Temperature Range	-20°C - 60°C (-4°F - 140°F)

Dimensions

7.09"
(180mm)


10.43"
(265mm)

10.24"(260mm)

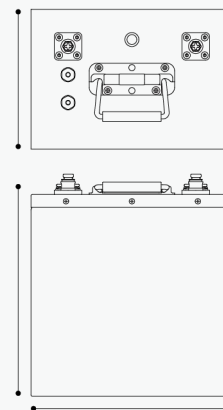


Performance Curves


Discharge Performance at 25°C

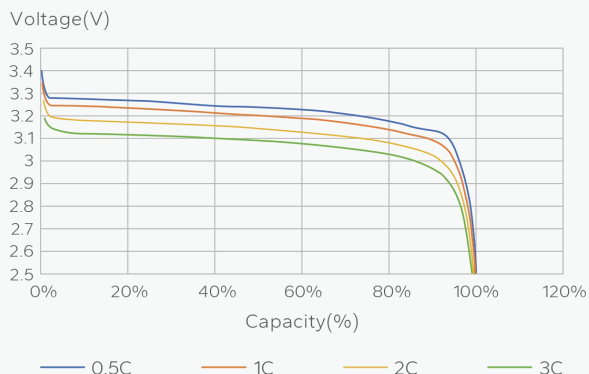


Charge and Discharge at 25°C, 0.5C

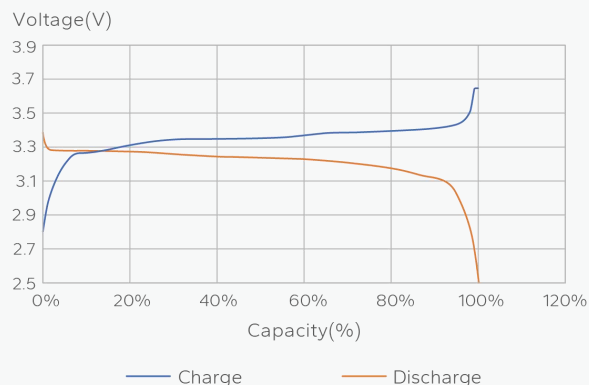

Discharge Curves at Different Temperature

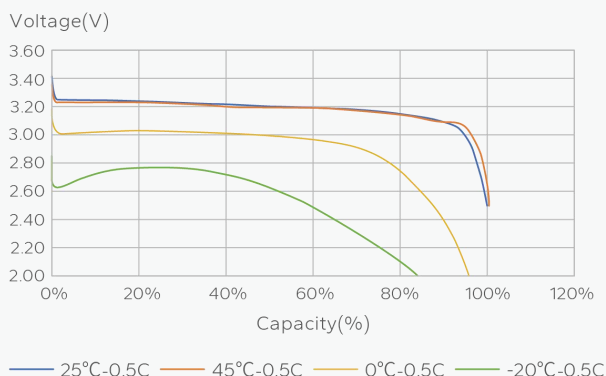


Cycle Life with DOD at 25°C

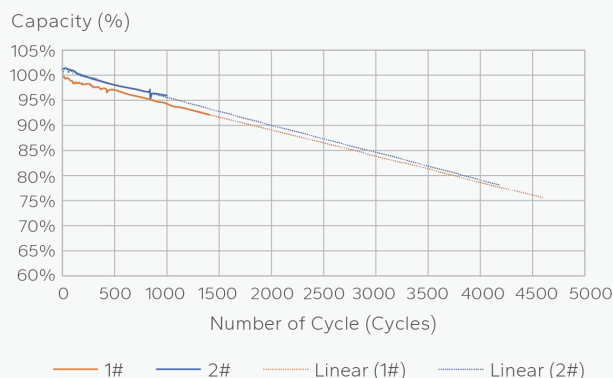

How to Estimate the Battery Capacity

The battery capacity could be roughly estimated by its **resting voltage** (not charging/discharging voltage). Since the voltage of each battery is slightly different, and the voltage measurement is affected by the measuring instrument, ambient temperature, etc., the following parameters are for reference only.

Resting Voltage: The voltage is measured after the battery has been disconnected from the charger and loads with zero current, and left alone for 30 minutes.

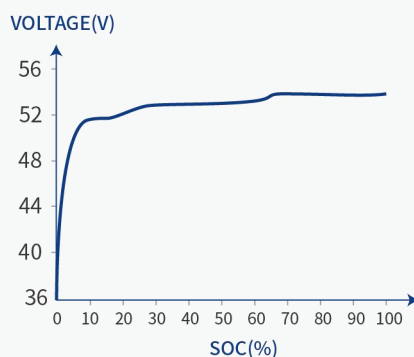

SOC (%)	VOLTAGE (V)
0	40 to 48
25	52 to 52.6
50	52.6 to 52.8
75	53.2 to 53.32
100	≥53.32

① Based on the characteristics of LiFePO4 batteries, the voltage measured by all LiFePO4 batteries during charging/discharging is not the real voltage of the battery. Therefore, after charging/discharging and disconnecting the battery from the power source, the voltage of the battery will gradually drop/increase to its real voltage.